

The information contained in this drawing is the sole property of **CWS/ByteMark, Inc.** Any reproduction in part or whole without written permission of **CWS/ByteMark, Inc.** is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	CHK	DATE
B		PRE-PRODUCTION RELEASE	9/16/03	TKK	JLW	9/16/03


MOUNTING HOLES PATTERN



PC-0308-43
Figure 1-A 3 Turns



PC-0428-43
Figure 2-A 4 Turns



PC-0528-43
Figure 3-A 5 Turns

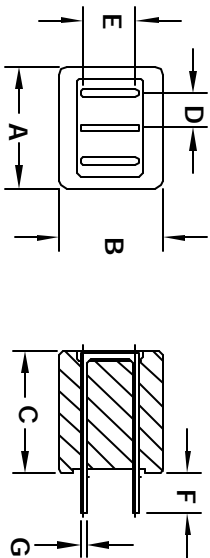


Figure 1

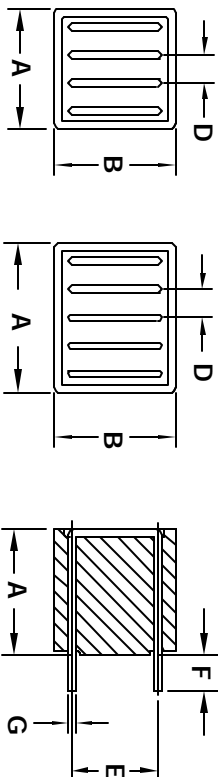


Figure 2

Figure 3

- HP 4193A VECTOR IMPEDANCE METER FOR IMPEDANCE WITH A SINGLE TURN THROUGH TWO END HOLES, USING A BEADS ARE CONTROLLED FOR IMPEDANCE LIMITS ONLY. THEY ARE TESTED
- A TIN/LEAD COATING
- JUMPER WIRE ARE OXYGEN FREE HIGH CONDUCTIVITY COPPER WITH WIRES ON TOP OF THE BEADS ARE COVERED WITH A LAYER OF EPOXY.

- TEMP. RATING: -55°C TO 125°C
DIELECTRIC = 500 Vrms AT 60 HZ
- SPECIFICATIONS:

- MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
- NOTES: UNLESS OTHERWISE SPECIFIED.

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			PARTS LIST	
			CWS/ByteMark, INC.	
			1510 E. Edinger Ave. Unit B, Santa Ana, CA 92705	
			PC Beads	
			PC-SERIES	
			SCALE 4=1	
			SHEET 1 OF 1	