


# OD 203

## OD 20.32mm / 0.800inch

**ID 12.70mm**  
**HT 6.35mm**

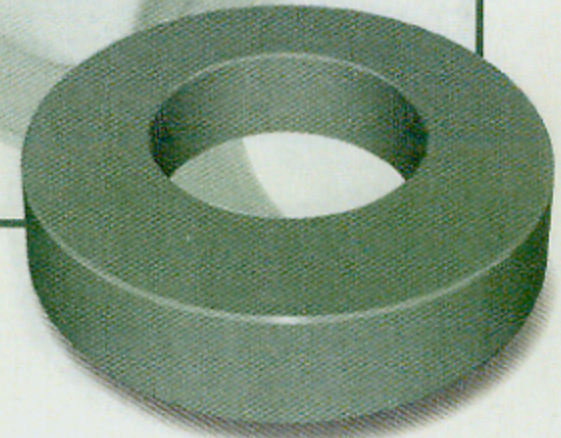

### Core Dimensions

		OD(max)	ID(min)	HT(max)
Before coating	(mm)	20.32	12.70	6.35
	(inch)	0.800	0.500	0.250
After coating (Epoxy)	(mm)	21.1	12.07	7.11
	(inch)	0.830	0.475	0.280

### Magnetic Dimensions

Cross Section (A)	Path Length (l)	Window Area (Wa)	Volume (V)
0.226cm <sup>2</sup>	5.09cm	1.14cm <sup>2</sup>	1.1510cm <sup>3</sup>
0.035in <sup>2</sup>	2.01in	225,600cmil	0.07035in <sup>3</sup>

### Winding Information

AWG Wire		Single Layer		AWG Wire		Single Layer	
No.	Dia.(cm)	Turns	Rdc, Ω	No.	Dia.(cm)	Turns	Rdc, Ω
12	0.213	13	0.00221	21	0.0785	40	0.0430
13	0.190	15	0.00307	22	0.0701	45	0.0604
14	0.171	17	0.00424	23	0.0632	50	0.0834
15	0.153	19	0.00590	24	0.0566	56	0.117
16	0.137	22	0.00822	25	0.0505	63	0.164
17	0.122	25	0.0114	26	0.0452	71	0.230
18	0.109	28	0.0159	27	0.0409	79	0.318
19	0.0980	32	0.0222	28	0.0366	89	0.448
20	0.0879	35	0.0308	29	0.0330	98	0.614

Single layer winding with 1 inch leads

### Available Cores

Part No.			AL	Perm.
MPP	High Flux	Sendust	(nH/N <sup>2</sup> )	(μ)
CM203026	CH203026	-	14	26
CM203060	CH203060	CS203060	32	60
-	-	CS203075	41	75
-	-	CS203090	49	90
CM203125	CH203125	CS203125	68	125
CM203147	CH203147	-	81	147
CM203160	CH203160	-	87	160
CM203173	-	-	96	173
CM203200	-	-	109	200

AL vs NI Curve (60μ, 125μ)

