


# OD 777

OD 77.8mm / 3.063inch

ID 49.23mm  
HT 12.70mm

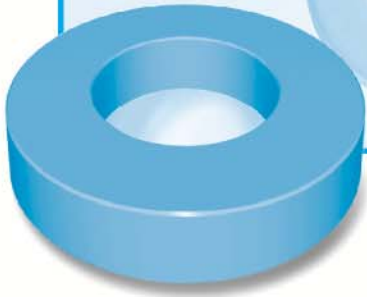

CWS BYTEMARK  
www.cwsbytemark.com  
Tel: (714) 279-9010  
Fax: (714) 279-9482

## Core Dimensions

		OD(max)	ID(min)	HT(max)
Before coating	(mm)	77.80	49.23	12.70
	(inch)	3.063	1.938	0.50
After coating (Epoxy)	(mm)	78.90	48.0	13.97
	(inch)	3.108	1.888	0.550

## Magnetic Dimensions

Cross Section (A)	Path Length (l)	Window Area (Wa)	Volume (V)
1.770cm <sup>2</sup>	20.0cm	17.99cm <sup>2</sup>	34.770cm <sup>3</sup>
0.274in <sup>2</sup>	7.72in	3,550,000cmil	2.122in <sup>3</sup>

## Available Cores

MPP	Part No.		AL (nH/N <sup>2</sup> )	Perm. (μ)
	High Flux	Sendust		
CM777026	CH777026	CS777026	30	26
CM777060	CH777060	CS777060	68	60
		CS777075	85	75
-	-	CS777090	102	90
CM777125	CH777125	CS777125	142	125
		-	-	-
-	-	-	-	160
-	-	-	-	173
-	-	-	-	200

## Winding Information

AWG Wire		Single Layer		AWG Wire		Single Layer	
No.	Dia.(cm)	Turns	Rdc, Ω	No.	Dia.(cm)	Turns	Rdc, Ω
10	0.267	53	0.0113	19	0.0980	150	0.258
11	0.238	60	0.0162	20	0.0879	168	0.364
12	0.213	67	0.0228	21	0.0785	188	0.514
13	0.190	76	0.0325	22	0.0701	211	0.732
14	0.171	84	0.0454	23	0.0632	235	1.02
15	0.153	95	0.0646	24	0.0566	263	1.30
16	0.137	106	0.0912	25	0.0505	295	1.84
17	0.122	119	0.129	26	0.0452	330	2.61
18	0.109	134	0.183	27	0.0409	365	3.62

Single layer winding with 1 inch leads

