

The information contained in this drawing is the sole property of Coil Winding Specialist Inc (CWS). Any reproduction in part or whole without written permission of CWS is prohibited.

SB-5625-43


Features

NiZn ferrite with a range of 20 to 250 MHz for suppression of conducted EMI, that is used for inductive applications (ex: high frequency common-mode chokes)

| REVISION HISTORY | | | | | |
|------------------|-----|--------------------|-------------|---------|------------|
| REV | ECN | DESCRIPTION | SIGN & DATE | | |
| | | | BY | DATE | AP. DATE |
| A | | Production release | EO | 10/8/13 | JL 10/8/13 |
| | | | | | |

| Electrical Specifications | | | | |
|--------------------------------------|-----------------------------------------|-------------------------------|-----------------|------|
| Item | Unit/Symbol | Condition | Value | Tol. |
| Typical Impedance | Ω | 1 MHz | N/A | Typ. |
| Typical Impedance | Ω | 5 MHz | N/A | Typ. |
| Typical Impedance | Ω | 10 MHz | 88 | Typ. |
| Typical Impedance | Ω | 25 MHz | 143 | Typ. |
| Typical Impedance | Ω | 100 MHz | 215 | Typ. |
| Typical Impedance | Ω | 250 MHz | 230 | Typ. |
| Initial Permeability | μ_0 | @ B < 10 gauss | 800 | Nom. |
| Temp. Coeff. Of initial Permeability | %, °C | 20 - 70 °C | 1.25 | Typ. |
| Coercive Force | H _c | oersted | 0.45 | Typ. |
| Residual Flux Density | Gauss, B _r | N/A | 1300 | Typ. |
| Flux Density | Gauss, B | Initial (B), oersted | 2900 | Typ. |
| | Gauss, H | @ Field Strength (H), oersted | 10 | Typ. |
| Curie temperature | °C | T _c | > 130 | Nom. |
| Resistivity | Ω cm, ρ | @ Field Strength | 10 ⁵ | Typ. |
| Loss Factor | 10 ⁻⁶ , tan δ / μ | Initial | 250 | Typ. |
| | MHz | @ Frequency | 1 | Typ. |

| Dimensional Tolerances | | | | |
|------------------------|---------|---------|-------|--------|
| | in | tol. | mm | tol. |
| B (Outer Diameter) | 0.562 | ± 0.018 | 14.30 | ± 0.45 |
| A (Inner Diameter) | 0.286 | ± 0.008 | 7.25 | ± 0.20 |
| LH (Length) | 1.125 | ± 0.029 | 28.60 | ± 0.75 |
| Weight | 16.00 g | | | |

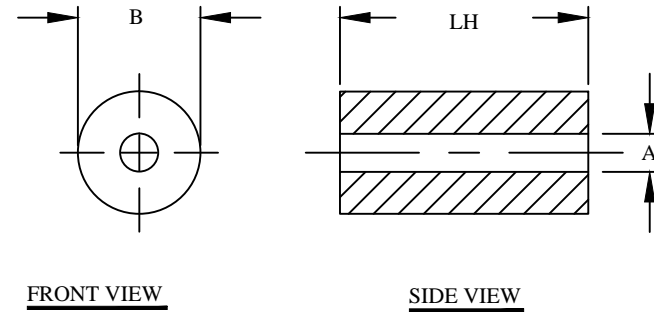

For additional detail, specifications and charts see:
http://www.bytemark.com/products/ferrite_matl.htm

| CODE IDENT | MFG. P/N | DESCRIPTION | ITEM NO. |
|-------------------------------------------------------------------|------------|----------------------------------------------------|---------------------------------------------------------|
| | | PARTS LIST | |
| AUTOCAD | X | www.coilws.com www.cwsbytemark.com | CWSBYTEMARK 353 West Grove Ave. Orange, CA. 92865 |
| SOLIDWORKS | | | |
| DRAWN | EO 10/8/13 | TITLE: Ferrite Shielding Bead Material 43, NiZn | |
| CHECKED | JL 10/8/13 | SIZE DWG. NO. | REV |
| ENGR. | JL 10/8/13 | B | A |
| APPR. | JL 10/8/13 | SCALE | SHEET 1 OF 1 |
| UNLESS OTHERWISE SPECIFIED | | N/A | |
| DIMENSIONING AND TOLERANCE PER ANSI Y14.5M | | | |
| ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS]. | | | |
| TOLERANCE INCHES: .XXX=±.005 .XX=±.015 \angle=±0°30' | | | |
| TOLERANCE METRICS: .XXX=±.127 .XX=±.38 \angle=±0°30' | | | |
| ANGLE PROJECTION | | | |
| DO NOT SCALE DRAWING | | | |