The information contained in this drawing is the sole property of Coil Winding Specialist Inc (CWS).
Any reproduction in part or whole without written permission of CWS is prohibited.

T16-12

REVISION HISTORY						
REV	ECN	DESCRIPTION	SIGN & DATE			
			BY	DATE	AP.	DATE
A		Production release	EO	3/7/13	JL	3/7/13

Features

Highest frequency

Applies to high Q below 150 MHz, for utilization of band transformer range within 400-700 MHz

Electrical Specifications				
Item	Unit/Symbol	Condition	Value	Tol.
A_L	nH/N^2	Typ.	0.8	± 5%
L_e	cm	N/A	0.93	Typ.
A_e	cm^2	N/A	0.015	Typ.
V_e	cm^3	N/A	0.0141	Typ.
Approx. Material Density	g/cm^3	N/A	4.8	Typ.
Permeability	μ_0	N/A	4.0	± 5%
Temperature Stability	+ppm/°C	N/A	170	Typ.

Resonant Circuit (---) and Broadband Frequency Range (+++)

Mix	Range (MHz)	2-50 KHz	50-250 KHz	250-500 KHz	500KHz-2MHz	2-10 MHz	10-40 MHz	40-150 MHz	150-250 MHz	250-500 MHz	500 MHz to 1GHz
42	0.3-80	----------									
3	0.02-1	----------									
8	0.02-1	----------					++++++++++				
1	0.15-3		----------						+++++++		
15	0.15-3		----------								
2	0.25-10			----------							
7	1-25				----------						
4	3-40					----------					
6	3-40					----------			+++++++		
10	15-100						----------			+++++++	
17	20-200						----------				
12	30-250						----------				
0	50-350							---------- +++			++++

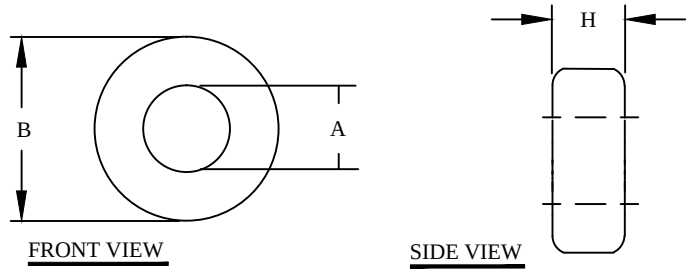

Case Dimensional Tolerances				
	in	tol.	mm	tol.
B (Outer Diameter)	0.160	0.010	4.06	0.25
A (Inner Diameter)	0.078	0.010	1.98	0.25
H (Height)	0.060	0.010	1.52	0.25
Weight 0.07 g				

For additional detail, specifications and charts see:

http://www.bytemark.com/products/IPCores_index.html

$$\text{Temperature Rise}: \Delta T(°C) = \left[\frac{\text{Total Power Dissipation (milliwatts)}}{\text{Surface Area } (cm^2)}\right]^{0.833}$$

$$\text{Required turns} = \left[\frac{\text{desired L (nH)}}{A_L\left(\frac{nH}{N^2}\right)}\right]^{\frac{1}{2}}$$

$$\text{Peak AC Flux Density}: B_{pk} = \frac{E_{avg}10^8}{4ANf}$$

$$\text{Magnetizing Force}: H = \frac{0.4\pi N I}{\ell}$$

L = inductance
nH = nanohenries
H = oersteds (Oe)
N = Number of turns
I = Current (amperes)
ℓ = Mean Magnetic Path (cm)
A = Cross-sectional area (cm^2)
f = frequency (hertz)
B_{pk} = Gauss (G)

UNLESS OTHERWISE SPECIFIED
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M
ALL DIMENSIONS ARE IN INCHES AND [MILIMETERS].
TOLERANCE INCHES: .XXX=±.005 .XX=±.015 ∢=±0°30'
TOLERANCE METRICS: .XXX=±.127 .XX=±.38 ∢=±0°30'
ANGLE PROJECTION
DO NOT SCALE DRAWING

	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
PARTS LIST				

AUTOCAD	X	
SOLIDWORKS		
SIGN		DATE
DRAWN	EO	3/7/13
CHECKED	JL	3/7/13
ENGR.	JL	3/7/13
APPR.	JL	3/7/13

www.coilws.com
www.cwsbytemark.com

CWSBYTEMARK
353 West Grove Ave. Orange, CA. 92865

TITLE: Iron Powder Core: Material Mix 12 (Synthetic Oxide), Green/White

SIZE B | DWG. NO. T16-12 | REV A

SCALE N/A | SHEET 1 OF 1

EP FORM0005 REV 3 10/01

CAD—FILE: