


The information contained in this drawing is the sole property of CW's Coil Winding Specialist. Any reproduction in part or whole without written permission of CW's Coil Winding Specialist is prohibited.

REVISION HISTORY			
REV	ECN	DESCRIPTION	SIGN & DATE
			BY DATE CHK DATE
A		PRE-PRODUCTION RELEASE	TKK 8/25/04 JAU 8/25/04

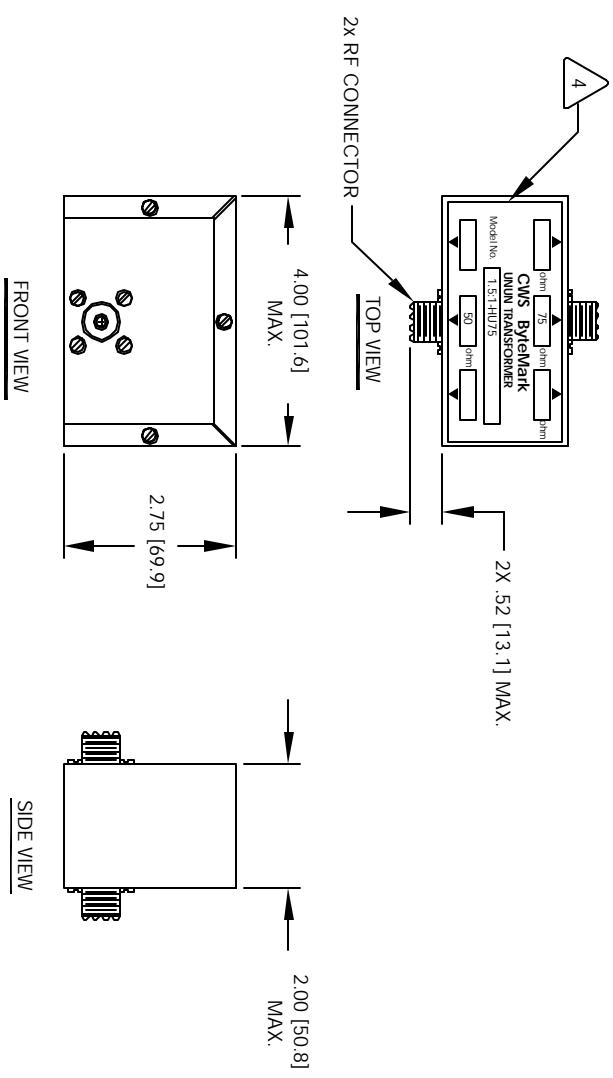

- 5 TO MATCH 750 COAXIAL CABLE TO 500 COAXIAL APPLICATIONS:
  - 4 WHERE SHOWN MARK PART NUMBER AND REVISION
  - 3 POWER RATING: 1 KW CONTINUOUS, 2 KW PEAK  
FREQUENCY RANGE: 1.0 MHZ TO 40 MHZ  
TO UNBALANCED OUTPUT: 750, SO239  
UNBALANCED CO-AXIAL INPUT: 500, SO239  
IMPEDANCE MATCH RATIO: 1.5:1
  - 2 SPECIFICATIONS:  
WIRE: UL RECOGNIZED 200°C RATED MAGNET WIRE  
CWS BYTEMARK OR OTHER APPROVED PART  
CORE: COATED FERRITE TOROID, K MATERIAL
  - 1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
- NOTES: UNLESS OTHERWISE SPECIFIED.

QTY		CODE	MFG. P/N	DESCRIPTION	ITEM NO.
IDENT					
AUTOCAD		X	PARTS LIST		
SOLIDWORKS			CWS Coil Winding Specialist.		
SIGN		DATE	1510 E. Edinger Ave. Unit B, Santa Ana, CA, 92705		
DRAWN		8/25/04	TITLE:		
TKK		8/25/04	UNUN Transformer		
CHECKED		8/25/04	500 to 750		
JLAU		8/25/04	SIZE DIM. IN.		
ENGR		8/25/04	1.5:1-HU75		
APPR.		8/25/04	SCALE		
JLAU		8/25/04	2=1		
			SHEET 1 OF 1		