



The information contained in this drawing is the sole property of CWS/BytelMark. Any reproduction in part or whole without written permission of CWS/BytelMark is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	DATE	CHK	DATE
B		PRE-PRODUCTION RELEASE	10/18/03	TKK	10/18/03	JLW	10/18/03

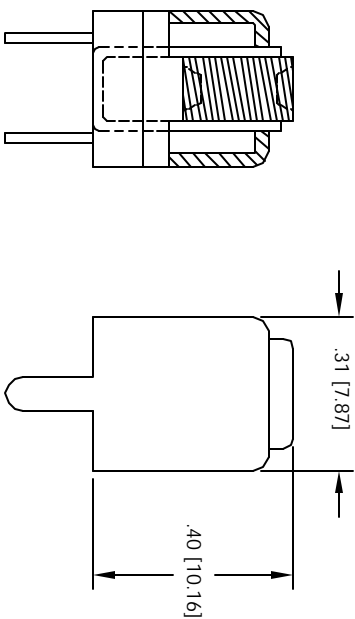

MOUNTING HOLES PATTERN

- COPPER SHIELD, TIN PLATED, EASY TO WIND. GOOD Q
- SUB MINUTURE SIZE SLUG TUNING
- FREQ. RANG 10KHZ - 200MHZ
INDUCTANCE RANGE = .08-180 uH
SPECIFICATIONS:
- BOBBIN RATING CLASS B (130°C) IF NEEDED
- MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED
DRAWING AND TOLERANCE PER FIG 11.5M
ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
TOLERANCE INCHES: .XX±.015
TOLERANCE METERS: .XX±.127
ANGLE PROJECTION
DO NOT SCALE DRAWING

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			PARTS LIST	
			CWS/BytelMark	
			1510 E. Edinger Ave, Unit B, Santa Ana, CA 92705	
			Iron Power Shielded Coil Forms	
			SIZE DWR. NR. L-33-SERIES	
			SCALE 4=1	
			SHEET 1 OF 1	