

The information contained in this drawing is the sole property of CWSByteMark. Any reproduction in part or whole without written permission of CWSByteMark is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	SIGN & DATE		
			BY	DATE	CHK
B		PRE-PRODUCTION RELEASE	TKK	9/15/03	JLUU


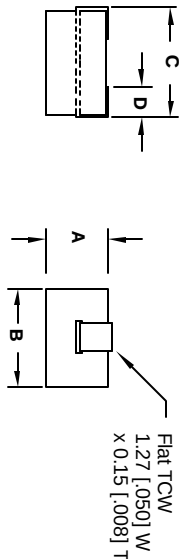


Figure 1



Foot Print Figure 1


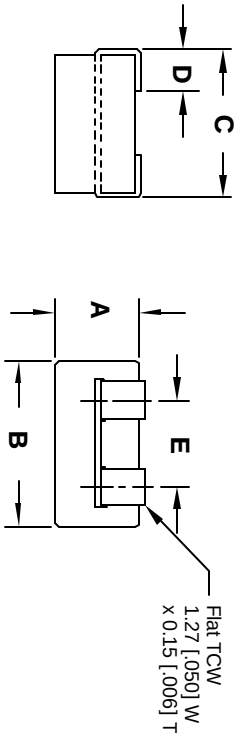


Figure 2



Foot Print Figure 2

HP 4193A RF IMPEDANCE ANALYZER.

FOR IMPEDANCE WITH A SINGLE TURN, USING A

BEADS ARE CONTROLLED FOR IMPEDANCE LIMITS ONLY. THEY ARE TESTED

3 THE COPPER CONDUCTOR HAVE A 200 U INCH THICK TIN/LEAD COATING

TEMP. RATING: -55°C TO 125°C

SPECIFICATIONS:

1 MATERIAL: , UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED.

QTY		CODE	MFG. P/N	DESCRIPTION	ITEM NO.	
		IDENT	PARTS LIST			
AUTOCAD		X		CWSByteMark 1510 E. Edinger Ave. Unit B, Santa Ana, CA 92705 SM Beads		
SOLIDWORKS						
SIGN		DATE				
DRAWN		9/22/03				
TKK		9/22/03				
CHKD		9/23/03				
JLUU		9/23/03				
DKR		9/23/03				
KSIU		9/23/03				
APPR.		9/23/03				
JLUU		9/23/03		SM-SERIES		
SCALE		B=1				
SHEET		1 OF 1				
REV		A				

UNLESS OTHERWISE SPECIFIED
DRAWING AND TOLERANCE PER ANSI Y14.5M
ALL DIMENSIONS ARE IN INCHES AND UNFRACTIONAL
TOLERANCE INCHES: .XXXX±.003 .XX±.015 .X±.030 .X±.030 .XX±.015 .XX±.015
ANGLE PROJECTION FIRST ANGLE
DO NOT SCALE DRAWING