

The information contained in this drawing is the sole property of Coil Winding Specialist Inc (CWS). Any reproduction in part or whole without written permission of CWS is prohibited.

CN100-80-20G


Features

- High Permeability (30-80K), high impedance Z and high insertion attenuation
- Suppresses the asymmetrical EMI currents
- High saturation Flux density can reduce over voltage peaks
- High Curie Temperature and excellent temperature characteristics

Electrical Specifications				
Item	Units	Condition	Value	Tol.
A _L	nH/N ²	@ 1kHz, 200mV	55160	± 25%
A _L	nH/N ²	@ 10kHz	30000	± 25%
A _L	nH/N ²	@ 100kHz	12000	± 25%
Permeability	μ ₀	@ 10 kHz	43000	± 25%
A _e	cm ²	N/A	2.00	± 10%
L _e	cm	N/A	28.3	± 10%
Saturation Current	mA	@ 10 kHz	80	± 20
Saturation Flux Density	T	N/A	1.2	Max.
Curie temperature	°C	N/A	580	Nom.

Dimensional Tolerances				
	in	tol.	mm	tol.
Core				
B (Outer Diameter)	3.94	±0.40	100	±1
H (Height)	0.79	±0.40	20	±1
A (Inner Diameter)	3.15	±0.40	80	±1
Case				
B (Outer Diameter)	4.10	±0.40	104	±1
H (Height)	0.94	±0.40	24	±1
A (Inner Diameter)	3.00	±0.40	76	±1
Weight	320.00 g			

REVISION HISTORY					
REV	ECN	DESCRIPTION	SIGN & DATE		
			BY	DATE	AP. DATE
A		Production release	EO	1/16/13	JL 1/16/13

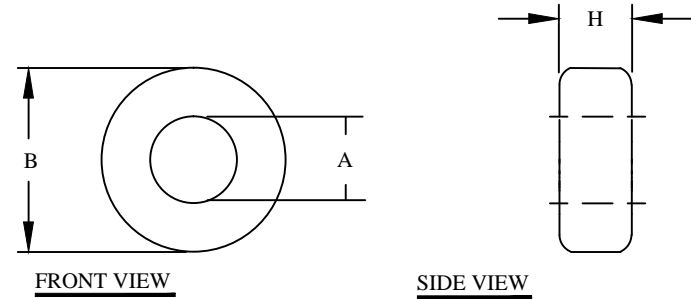

For additional detail, specifications and charts see:

http://www.bytemark.com/products/comp_nanoc_cmchoke.html

http://www.bytemark.com/products/Nanocrystalline_cores.html

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
		PARTS LIST	
AUTOCAD	X	www.coilws.com www.cwsbytemark.com	CWSBYTEMARK 353 West Grove Ave. Orange, CA. 92865
SOLIDWORKS			
DRAWN	EO 1/16/13	Nanocrystalline Core TITLE: SIZE DWG. NO. CN100-80-20G REV A	
CHECKED	JL 1/16/13		
ENGR.	JL 1/16/13		
APPR.	JL 1/16/13		
UNLESS OTHERWISE SPECIFIED		SCALE	N/A
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS]. TOLERANCE INCHES: .XXX=±.005 .XX=±.015 $\sphericalangle=±0°30'$ TOLERANCE METRICS: .XXX=±.127 .XX=±.38 $\sphericalangle=±0°30'$		SHEET	1 OF 1
ANGLE PROJECTION		DO NOT SCALE DRAWING	