
| e information c y reproduction | contained in this drawing is the sole prop in part or whole without written permis | perty of Coil Winding Sposion of CWS is prohibite | ecialist Inc (CWS). d. | | | | | | | | REVISION HISTORY | | | | |
|---|---|---|---------------------------|------------|-------|------|--------|---------|---|-------------|--------------------|----|---------|-------|--------|
| | · · · | | | | | | RE | REV ECN | | DESCRIPTION | SIGN & DATE | | | | |
| | | | | | | | | - | | | | BY | DATE | AP. | DATE |
| | Features | | | | | F- | 125-67 | I | 4 | | Production release | EO | 7/31/13 | \$ JL | 7/31/1 |
| | | ith a range up to 50 | MHz used for broadband to | ansformers | | | | | | | | | | | |
| NiZn ferrite material with a range up to 50 MHz used for broadband transformers, antennas and HF high Q inductor applications. | | | | | | | | | | | | | | | |
| Burnished to break sharp edges, can contain Parylene C coat at smaller diameters from the length of 9.5mm (0.375") or a uniform coating of thermo-set plastic at larger dimensions (if part numbers ends with a C). | | | | | | | | | | | | | | | |
| | Electrical Specifications | | | | | | | | | | н | | | | |
| | Item | Unit/Symbol | Condition | v | /alue | Tol. | | | | | | | | | |
| | | 11012 | @ 10 KHz | | 20 | | 1 | 1 | ~ | | | | | | |


В

FRONT VIEW

| Item | Unit/Symbol | Condition | Value | Tol. | |
|---|-----------------------------|-------------------------------|-------|-------|--|
| A _L | nH/N ² | @ 10 KHz | 39 | ± 25% | |
| Le | cm | N/A | 7.6 | ±10% | |
| Ae | cm ² | N/A | 0.59 | ± 10% | |
| Ve | cm ³ | N/A | 4.500 | ± 10% | |
| Initial Permeability | μ ₀ | @ B < 10 gauss | 40 | ± 25% | |
| Temp. Coeff. Of initial Permeability | %, °C | 20 - 70 °C | 0.05 | Тур. | |
| Coercive Force | H _c | oersted | 3.5 | Тур. | |
| Residual Flux Density | Gauss, Br | N/A | 800 | Тур. | |
| Flux Density | Gauss, B | Initial (B), oersted | 2300 | Тур. | |
| | Gauss, H | @ Field Strength (H), oersted | 20 | Тур. | |
| Curie temperature | °C | Tc | > 475 | Nom. | |
| Resistivity | Ω cm, ρ | @ Field Strength | 107 | Тур. | |
| Loss Factor | 10 ⁻⁶ , tanδ / μ | Initial | 150 | Тур. | |
| | MHz | @ Frequency | 50 | Тур. | |

| Dimensional Tolerances | | | | | | | | |
|------------------------|-------|---------|-------|--------|--|--|--|--|
| | in | tol. | mm | tol. | | | | |
| Case | | | | | | | | |
| B (Outer Diameter) | 1.250 | ± 0.029 | 31.75 | ± 0.75 | | | | |
| A (Inner Diameter) | 0.750 | ± 0.019 | 19.05 | ± 0.50 | | | | |
| H (Height) | 0.375 | ± 0.012 | 9.50 | ± 0.30 | | | | |
| Weight 23.00 g | | | | | | | | |






SIDE VIEW

Α

Т

http://www.bytemark.com/products/ferrite_matl.htm

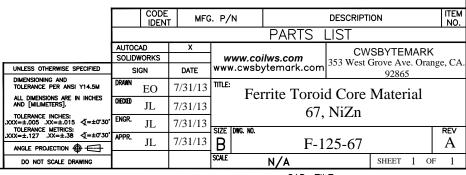

CAD-FILE: