

primation contained in this drawing is the sole property of Coil Winding Specialist Inc (CWS). production in part or whole without written permission of CWS is prohibited.				<b>REVISION HISTORY</b>				
· · · · · · · · · · · · · · · · · · ·		REV	ECN	DESCRIPTION	SIGN & DATE BY DATE AP. DAT			
Features	F-240-43	А		Production release	EO	1/31/13	JL	1/31/
NiZn ferrite with a range of 20 to 250 MHz for suppression of conducted EMI, that is used for inductive applications (ex: high frequency common-mode chokes)								
Burnished to break sharp edges, can contain Parylene C coat at smaller diameters from length 9 5mm (0.375") or a uniform coating of thermo-set								

diameters from length 9.5mm (0.375") or a uniform coating of thermo-set plastic for larger dimension (if part numbers ends with a C).

	Electri	ical Specifications			
Item	Unit/Symbol	Condition	Value	Tol.	
A <sub>L</sub>	nH/N <sup>2</sup>	@ 10 KHz	1075	$\pm 20\%$	
Le	cm	N/A	14.5	± 10%	
Ae	cm <sup>2</sup>	N/A	1.58	± 10%	
Ve	cm <sup>3</sup>	N/A	22.8	± 10%	
Initial Permeability	μ <sub>0</sub>	@ B < 10 gauss	800	± 20%	
Temp. Coeff. Of initial Permeability	%, °C	20 - 70 °C	1.25	Тур.	
Coercive Force	H <sub>c</sub>	oersted	0.45	Тур.	
Residual Flux Density	Gauss, Br	N/A	1300	Тур.	
Flux Density	Gauss, B	Initial (B), oersted	2900	Тур.	
	Gauss, H	@ Field Strength (H), oersted	10	Тур.	
Curie temperature	°C	Tc	> 130	Nom.	
Resistivity	$\Omega$ cm, $\rho$	@ Field Strength	10 <sup>5</sup>	Тур.	
Loss Factor	10 <sup>-6</sup> , tanδ / μ	Initial	250	Тур.	
	MHz	@ Frequency	1	Тур.	

Dimensional Tolerances							
	in	tol.	mm	tol.			
Case							
B (Outer Diameter)	2.400	$\pm 0.051$	61.00	± 1.30			
A (Inner Diameter)	1.400	± 0.033	35.55	± 0.85			
H (Height)	0.500	± 0.020	12.70	± 0.50			
Weight 106.00 g							



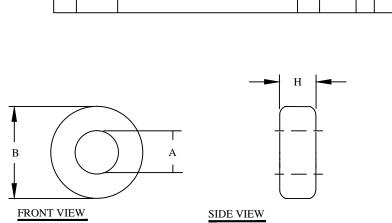

## For additional detail, specifications and charts see:

http://www.bytemark.com/products/ferrite\_matl.htm

		CODE IDENT	. MFG	G. P/N		DESCRIPT	CRIPTION			
				PARTS LIST						
	AUTOCA	ND	Х	www.coilws.com www.cwsbytemark.com		CW	SBYTEMA	ΒK		
	SOLIDW	ORKS				353 West	Grove Ave. C		e CA	
UNLESS OTHERWISE SPECIFIED	sic	SN	DATE			555 West	92865	/iulie	,0, 011.	
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M	DRAWN	EO	1/31/13	TITLE		rrite Toroi	d Coro		1	
ALL DIMENSIONS ARE IN INCHES AND [MILIMETERS].	CHECKED	JL	1/31/13		re			Materia	L	
TOLERANCE INCHES: .XXX=±.005 .XX=±.015 ◀=±0°30° TOLERANCE METRICS:	ENGR.	JL	1/31/13	0175	43, NiZn size lowg. no.					001
ANGLE PROJECTION ⊕ ET	APPR.	JL	1/31/13	B	DING. NO.	F-2	240-43			rev A
DO NOT SCALE DRAWING				SCALE		N/A		SHEET 1	OF	1

CAD-FILE: