F-50-77C


Features

 $\,$ MnZn ferrite material with range up to 100 kHz for wide range of high and low flux density inductive designs.

Burnished to break sharp edges, can contain Parylene C coat at smaller diameters from the length of 9.5mm (0.375") or a uniform coating of thermo-set plastic at larger dimensions (if part numbers ends with a C).

Electrical Specifications								
Item	Unit/Symbol	Condition	Value	Tol.				
A_L	nH/N ² @ 10 KHz		1180	± 25%				
Le	cm N/A		2.95	± 10%				
Ae	cm ²	cm ² N/A		± 10%				
Ve	cm ³	N/A		± 10%				
Initial Permeability	μ_0	@ B < 10 gauss	2000	± 20%				
Temp. Coeff. Of initial Permeability	%, °C	20 - 70 °C	0.7	Тур.				
Coercive Force	H _c	oersted	0.30	Тур.				
Residual Flux Density	Gauss, Br	N/A	1800	Тур.				
Flux Density	Gauss, B	Initial (B), oersted	4900	Тур.				
	Gauss, H	@ Field Strength (H), oersted	5	Тур.				
Curie temperature	°C	T _c	> 200	Nom.				
Resistivity	Ω cm, ρ	@ Field Strength	10^{2}	Тур.				
Loss Factor	10 ⁻⁶ , tanδ / μ	Initial	15	Тур.				
	MHz	@ Frequency	0.1	Тур.				

Dimensional Tolerances								
	in	tol.	mm	tol.				
Case								
B (Outer Diameter)	0.529	Max	13.45	Max				
A (Inner Diameter)	0.254	Min	6.45	Min				
H (Height)	0.212	Max	5.40	Max				
Weight 2.00 g								

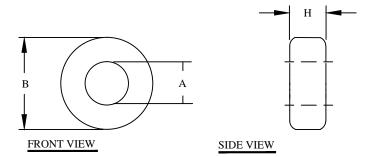

For additional detail, specifications and charts see:

http://www.bytemark.com/products/ferrite_matl.htm

	CODE MFC		5. P/N	DESCRIPTI		ON	ITEM NO.	
	PARTS LIST							
	AUTOCAD		Х			CWSBYTEMARK		
	SOLIDY	vorks		www.coilws.com		353 West Grove Ave Oran		ge CA
UNLESS OTHERWISE SPECIFIED	SIGN		DATE	www.cwsb	temark.com	92865		5-, 011.
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M	DRAWN	ЕО	1/31/13					
ALL DIMENSIONS ARE IN INCHES AND [MILIMETERS].	CHECKED	JL	1/31/13		77, MnZn, Plastic Coated			
TOLERANCE INCHES: .XXX=±.005 .XX=±.015 < √=±0'30' TOLERANCE METRICS:	ENGR.	JL	1/31/13					DE./
.XXX=±.127 .XX=±.38 <\(=±0°30°\) ANGLE PROJECTION ⊕ ==	APPR.	JL	1/31/13	SIZE DWG. NO.	F-5	0-77C		REV A
DO NOT SCALE DRAWING				SCALE	N/A		SHEET 1 OF	1

EP FORM0005 REV 3 10/01 CAD-FILE: