

The information contained in this drawing is the sole property of Coil Winding Specialist Inc (CWS).
Any reproduction in part or whole without written permission of CWS is prohibited.

Features

NiZn ferrite with a range of 20 to 250 MHz for suppression of conducted EMI, that is used for inductive applications (ex: high frequency common-mode chokes)

Burnished to break sharp edges, can contain Parylene C coat at smaller diameters from length 9.5mm (0.375") or a uniform coating of thermo-set plastic for larger dimension (if part numbers ends with a C).

F-50B-43

Electrical Specifications


Item	Unit/Symbol	Condition	Value	Tol.
A _L	nH/N ²	@ 10 KHz	965	± 20%
L _e	cm	N/A	3.12	± 10%
A _e	cm ²	N/A	0.299	± 10%
V _e	cm ³	N/A	0.93	± 10%
Initial Permeability	μ ₀	@ B < 10 gauss	800	± 20%
Temp. Coeff. Of initial Permeability	%, °C	20 - 70 °C	1.25	Typ.
Coercive Force	H _c	oersted	0.45	Typ.
Residual Flux Density	Gauss, B _r	N/A	1300	Typ.
Flux Density	Gauss, B	Initial (B), oersted	2900	Typ.
	Gauss, H	@ Field Strength (H), oersted	10	Typ.
Curie temperature	°C	T _c	> 130	Nom.
Resistivity	Ω cm, ρ	@ Field Strength	10 ⁵	Typ.
Loss Factor	10 ⁻⁶ , tanδ / μ	Initial	250	Typ.
	MHz	@ Frequency	1	Typ.

Dimensional Tolerances


	in	tol.	mm	tol.
Case				
B (Outer Diameter)	0.500	± 0.010	12.70	± 0.25
A (Inner Diameter)	0.312	± 0.008	7.90	± 0.20
H (Height)	0.500	± 0.014	12.70	± 0.35
Weight 4.70 g				

REVISION HISTORY

REV	ECN	DESCRIPTION	SIGN & DATE			
			BY	DATE	AP.	DATE
A		Production release	EO	1/31/13	JL	1/31/13

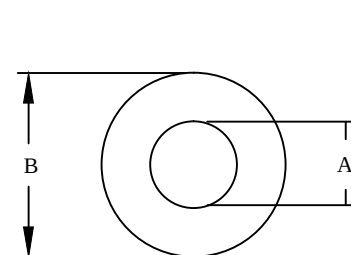

FRONT VIEW



SIDE VIEW

For additional detail, specifications and charts see:

http://www.bytemark.com/products/ferrite_matl.htm

CODE IDENT		MFG. P/N	DESCRIPTION		ITEM NO.
PARTS LIST					
AUTOCAD		X	www.coilws.com www.cwsbytemark.com CWSBYTEMARK 353 West Grove Ave. Orange, CA. 92865		
SOLIDWORKS					
SIGN		DATE	TITLE: Ferrite Toroid Core Material 43, NiZn		
DRAWN	EO	1/31/13			
CHECKED	JL	1/31/13			
ENGR.	JL	1/31/13			
APPR.	JL	1/31/13			
			SIZE DWG. NO.		REV
			B F-50B-43		A
			SCALE N/A		SHEET 1 OF 1

UNLESS OTHERWISE SPECIFIED
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M
ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
TOLERANCE INCHES: .XXX=±.005 .XX=±.015 <X=±0.30
TOLERANCE METRICS: .XXX=±.127 .XX=±.38 <X=±0.30
ANGLE PROJECTION
DO NOT SCALE DRAWING