F-82-77

REVISION HISTORY REV ECN DESCRIPTION SIGN & DATE BY DATE AP. DATE A Production release EO 1/31/13 JL 1/31/13


Features

 $\,$ MnZn ferrite material with range up to 100 kHz for wide range of high and low flux density inductive designs.

Burnished to break sharp edges, can contain Parylene C coat at smaller diameters from the length of 9.5mm (0.375") or a uniform coating of thermo-set plastic at larger dimensions (if part numbers ends with a C).

| Electrical Specifications | | | | | | | | |
|---|----------------------------------|-------------------------------|----------|-------|--|--|--|--|
| Item | Unit/Symbol | mbol Condition | | Tol. | | | | |
| A_L | nH/N ² | @ 10 KHz | 1175 | ± 20% | | | | |
| Le | cm | N/A | 5.2 | ± 10% | | | | |
| Ae | cm ² N/A | | 0.243 | ± 10% | | | | |
| Ve | cm ³ | cm ³ N/A | | ± 10% | | | | |
| Initial Permeability | μ_0 | μ_0 @ B < 10 gauss | | ± 20% | | | | |
| Temp. Coeff. Of initial Permeability | %, °C | 20 - 70 °C | | Тур. | | | | |
| Coercive Force | H _c | oersted | 0.30 | Тур. | | | | |
| Residual Flux Density | Gauss, Br | N/A | 1800 | Тур. | | | | |
| Flux Density | Gauss, B | Initial (B), oersted | 4900 | Тур. | | | | |
| | Gauss, H | @ Field Strength (H), oersted | 5 | Тур. | | | | |
| Curie temperature | °C | T _c | > 200 | Nom. | | | | |
| Resistivity | Ω cm, ρ | @ Field Strength | 10^{2} | Тур. | | | | |
| Loss Factor | 10^{-6} , tan δ / μ | Initial | 15 | Тур. | | | | |
| | MHz | @ Frequency | 0.1 | Тур. | | | | |

| Dimensional Tolerances | | | | | | | |
|------------------------|-------|---------|-------|--------|--|--|--|
| | in | tol. | mm | tol. | | | |
| Case | | | | | | | |
| B (Outer Diameter) | 0.825 | ± 0.014 | 21.00 | ± 0.35 | | | |
| A (Inner Diameter) | 0.520 | ± 0.012 | 13.20 | ± 0.30 | | | |
| H (Height) | 0.250 | ± 0.010 | 6.35 | ± 0.25 | | | |
| Weight 6.40 g | | | | | | | |

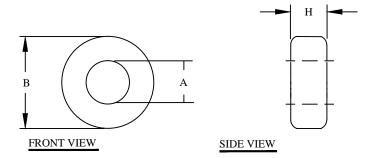

For additional detail, specifications and charts see:

http://www.bytemark.com/products/ferrite_matl.htm

| | CODE MFG | | 5. P/N | DESCRIPTI | | ON | ITEM NO. | |
|--|------------|------|---------|----------------|-------------|-------------------------|-------------|----------|
| | PARTS LIST | | | | | | | |
| | AUTOCAD | | Х | | | CWSBYTEMARK | | |
| | SOLIDWO | DRKS | | www.coilws.com | | 353 West Grove Ave Orar | | e CA |
| UNLESS OTHERWISE SPECIFIED | SIGN | | DATE | www.cwsb | ytemark.com | 92865 | | 50, 011. |
| DIMENSIONING AND TOLERANCE PER ANSI Y14.5M | DRAWN | ЕО | 1/31/13 | | | | | |
| ALL DIMENSIONS ARE IN INCHES AND [MILIMETERS]. | CHECKED | JL | 1/31/13 | 1.6 | 77, MnZn | | | |
| TOLERANCE INCHES: .XXX=±.005 .XX=±.015 < √=±0'30' TOLERANCE METRICS: | ENGR. | JL : | 1/31/13 | , | | | | 55. |
| .XXX=±.127 .XX=±.38 <=±0°30° ANGLE PROJECTION | APPR. | JL : | 1/31/13 | SIZE DWG. NO. | F-8 | 32-77 | | REV A |
| DO NOT SCALE DRAWING | | | | SCALE | N/A | | SHEET 1 OF | 1 |

EP FORMO005 REV 3 10/01 CAD-FILE: