F-82-77C

REVISION HISTORY								
REV	ECN	DESCRIPTION	SIGN & DATE					
			BY	DATE	AP.	DATE		
A		Production release	ЕО	1/31/13	JL	1/31/13		


Features

 $\,$ MnZn ferrite material with range up to 100 kHz for wide range of high and low flux density inductive designs.

Burnished to break sharp edges, can contain Parylene C coat at smaller diameters from the length of 9.5mm (0.375") or a uniform coating of thermo-set plastic at larger dimensions (if part numbers ends with a C).

Electrical Specifications							
Item	Unit/Symbol	Condition	Value	Tol.			
A_{L}	nH/N ²	@ 10 KHz	1270	± 25%			
Le	cm	N/A	5.2	± 10%			
Ae	cm ²	N/A	0.243	± 10%			
Ve	cm ³	N/A	1.26	± 10%			
Initial Permeability	μ_0	@ B < 10 gauss	2000	± 20%			
Temp. Coeff. Of initial Permeability	%, °C	20 - 70 °C	0.7	Тур.			
Coercive Force	H _c	oersted	0.30	Тур.			
Residual Flux Density	Gauss, Br	N/A	1800	Тур.			
Flux Density	Gauss, B	Initial (B), oersted	4900	Тур.			
	Gauss, H	@ Field Strength (H), oersted	5	Тур.			
Curie temperature	°C	T _c	> 200	Nom.			
Resistivity	Ω cm, ρ	@ Field Strength	10^{2}	Тур.			
Loss Factor	10 ⁻⁶ , tanδ / μ	Initial	15	Тур.			
	MHz	@ Frequency	0.1	Тур.			

Dimensional Tolerances							
	in	tol.	tol. mm				
Case							
B (Outer Diameter)	0.860	Max	21.85	Max			
A (Inner Diameter)	0.489	Min	12.40	Min			
H (Height)	0.279	Max	7.10	Max			
Weight 6.40 g							

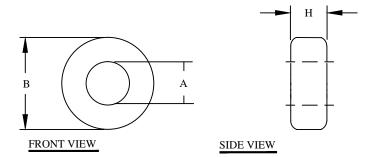

For additional detail, specifications and charts see:

http://www.bytemark.com/products/ferrite_matl.htm

	CODE IDENT MFG		G. P/N PARTS		DESCRIPTION LIST		ITEM NO.	
	AUTOC	_	Х	www.coilws.com		CWSBYTEMARK 353 West Grove Ave. Orange,		
UNLESS OTHERWISE SPECIFIED	SI	GN	DATE			92865		range, CA.
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M	DRAWN	ЕО	1/31/13	TITLE:	rrita Toroi	d Core		
ALL DIMENSIONS ARE IN INCHES AND [MILIMETERS].	CHECKED	JL	1/31/13	//, MnZn, Plastic Coated				
TOLERANCE INCHES: .XXX=±.005 .XX=±.015 ≪=±0'30' TOLERANCE METRICS:	ENGR.	JL	1/31/13					l REV
.XXX=±.127 .XX=±.38 ANGLE PROJECTION	APPR.	JL	1/31/13	1 1			A	
DO NOT SCALE DRAWING				SCALE	N/A		SHEET 1	OF 1

EP FORMO005 REV 3 10/01 CAD-FILE: