

The information contained in this drawing is the sole property of Coil Winding Specialist Inc (CWS). Any reproduction in part or whole without written permission of CWS is prohibited.

F-37-F


Features

MnZn ferrite material for common mode chokes, power transformers, power inductors, broadband transformers, noise filter and etc.

Electrical Specifications				
Item	Unit/Symbol	Condition	Value	Tol.
A_L	mH/1000	@ 5 gauss in a de-gaussed state	1314	± 20%
L_e	cm	N/A	2.07	± 10%
A_e	cm ²	N/A	0.07	± 10%
V_e	cm ³	N/A	0.145	± 10%
Density	g/cm ³	N/A	4.8	Typ.
Permeability	μ_0	Typical	3000	± 20%
Coercivity	O_e , A/m	Typical	0.2, 16	Typ.
Flux Density	Gauss, B	Typical	4900	Typ.
	Gauss, H	@ 1194 A/m, 15 oe mT	490	Typ.
Curie temperature	°C	T_c	> 250	Typ.
Resistivity	Ω cm, ρ	Typical	2	Typ.
Relative Loss Factor	10^{-6}	$\tan\delta / \mu$	< 8	Typ.
	kHz	@ Frequency	100	Typ.
Max. Usable freq.	MHz	50% roll-off	< 1.3	Typ.
Remanence	G, mT	Typical	1200, 120	Typ.
Disaccommodation Factor	10^{-6}	Typical	N/A	Typ.

Power Loss (P_L), Sine Wave, in mW/cm ³ (typical)							
Condition		@ 25 °C		@ 60 °C		@ 100 °C	@ 120 °C
I	25 kHz	90	200 mT	160	2000 G	240	N/A
II	100 kHz	100	100 mT	180	1000 G	225	N/A
III	500 kHz	N/A	50 mT	N/A	500 G	N/A	N/A
IV	700 kHz	N/A	50 mT	N/A	500 G	N/A	N/A

REVISION HISTORY					
REV	ECN	DESCRIPTION	SIGN & DATE		
			BY	DATE	AP. DATE
A		Production release	EO	2/13/13	JL 2/13/13

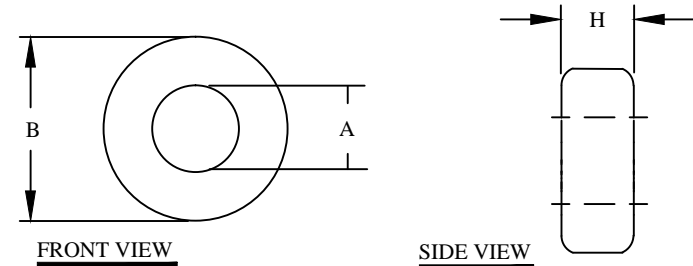

Case Dimensional Tolerances				
	in	tol.	mm	tol.
B (Outer Diameter)	0.375	0.385 Max	9.53	9.78 Max
A (Inner Diameter)	0.187	0.177 Min	4.75	4.49 Min
H (Height)	0.125	0.130 Max	3.18	3.31 Max
Weight 0.82 g				

For additional detail, specifications and charts see:

<http://www.bytemark.com/>

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
		PARTS LIST	
AUTOCAD	X	www.coilws.com www.cwsbytemark.com	CWSBYTEMARK 353 West Grove Ave. Orange, CA. 92865
SOLIDWORKS			
DRAWN	EO 2/13/13	TITLE: Ferrite Toroid Core MnZn Material F, uncoated	
CHECKED	JL 2/13/13		
ENGR.	JL 2/13/13		
APPR.	JL 2/13/13	SIZE DWG. NO.	REV
		B	F-37-F
		SCALE	SHEET 1 OF 1
		N/A	

UNLESS OTHERWISE SPECIFIED
 DIMENSIONING AND TOLERANCE PER ANSI Y14.5M
 ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
 TOLERANCE INCHES:
 .XXX=±.005 .XX=±.015 \angle =±0°30'
 TOLERANCE METRICS:
 .XXX=±.127 .XX=±.38 \angle =±0°30'
 ANGLE PROJECTION \angle
 DO NOT SCALE DRAWING