The information contained in this drawing is the sole property of CWS Coil Winding Specialist.
Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	SIGN & DATE			
			BY	DATE	CHK	DATE
A		PRODUCTION RELEASE	TDK	8/25/04	JLAU	8/25/04

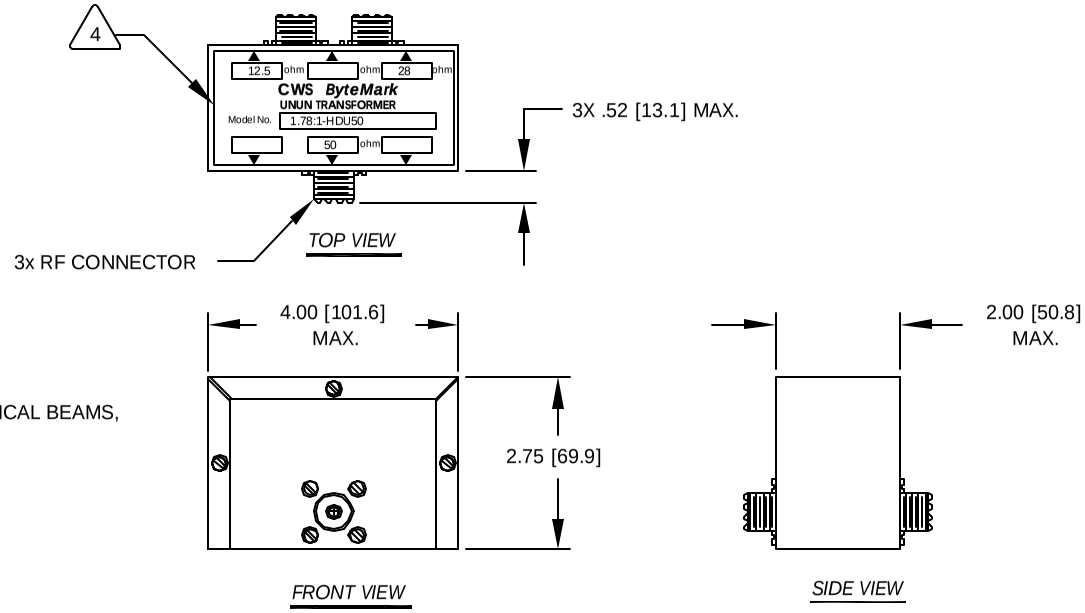

SLOPERS AND INVERTED L's, AND TOWERS AS VERTICALS.
GROUND FED ANTENNAS - SHORTENED VERTICALS, VERTICAL BEAMS,

5 APPLICATIONS:

4 WHERE SHOWN
MARK PART NUMBER AND REVISION

POWER RATING: 1 KW CONTINUOUS, 2 KW PEAK.
FREQUENCY RANGE: 1 MHZ TO 30 MHZ
TO UNBALANCED OUTPUT: EITHER 28 O OR 12.5 O, SO239
UNBALANCED CO-AXIAL INPUT: 50 O , SO239
IMPEDANCE MATCH RATIO: 1.78 :1 AND 4:1

3 SPECIFICATIONS:

WIRE: UL RECOGNIZED 200°C RATED MAGNET WIRE
CWS BYTEMARK OR OTHER APPROVED PART

2 CORE: COATED FERRITE TOROID, K MATERIAL

1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED.

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.

PARTS LIST

UNLESS OTHERWISE SPECIFIED
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M
ALL DIMENSIONS ARE IN INCHES AND [MILIMETERS].
TOLERANCE INCHES: .XXX=±.010 .XX=±.020 ∠=±0°30'
TOLERANCE METRICS: .XXX=±.254 .XX=±.51 ∠=±0°30'
ANGLE PROJECTION
DO NOT SCALE DRAWING

	SIGN	DATE
AUTOCAD	X	
SOLIDWORKS		
DRAWN	TDK	8/25/04
CHECKED	JLAU	8/25/04
ENGR.	KSUM	8/25/04
APPR.	JLAU	8/25/04

COILWS COM, INC
www.coilws.com
CWS Coil Winding Specialist.
1510 E. Edinger Ave.
Unit B, Santa Ana, CA. 92705

TITLE: Dual Output Unun Transformer
50 O to 28 O & 50 O to 12.5 O

SIZE B | DWG. NO. 1.78:1-HDU50 | REV A

SCALE 2=1 | SHEET 1 OF 1

CAD-FILE: